

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

THICKNESS

- (T) NPS: ≤ 18 - Per B16.48 (+ 0.12, -0)
- (T) NPS: ≥ 20 - Per B16.48 (+ 0.19, -0)
- (T) NPS: ≥ 26 - Per B31.3 (HBS + 0.25, -0)

All Units: Inches, Pounds

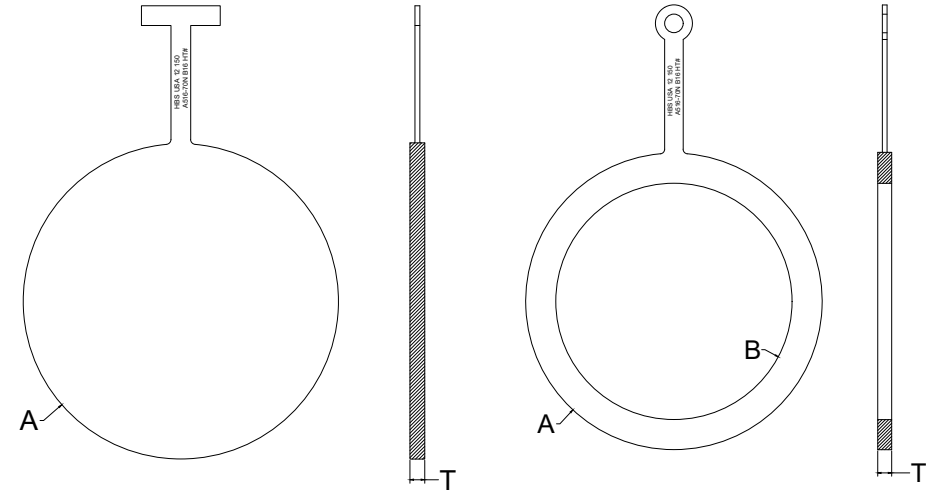

24 HOUR CALL OUT
409.736.7665

150#	OD (A)	ID (B)	THICKNESS (T)	PADDLE WT	SPACER WT
1/2	1.75	0.62	0.25	1	1
3/4	2.12	0.82	0.25	1	1
1	2.50	1.05	0.25	1	1
1-1/4	2.88	1.66	0.25	1	1
1-1/2	3.25	1.90	0.25	1	1
2	4.00	2.38	0.25	2	1
2-1/2	4.75	2.88	0.25	2	1
3	5.25	3.50	0.25	2	1
3-1/2	6.25	4.00	0.38	4	3
4	6.75	4.50	0.38	5	3
5	7.62	5.56	0.38	6	3
6	8.62	6.62	0.50	10	4
8	10.88	8.62	0.50	15	6
10	13.25	10.75	0.62	26	10
12	16.00	12.75	0.75	47	19
14	17.62	14.00	0.75	56	22
16	20.12	16.00	0.88	84	33
18	21.50	18.00	1.00	108	35
20	23.75	20.00	1.12	146	45
24	28.12	24.00	1.25	227	65