

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


THICKNESS

- (T) NPS: ≤ 18 - (HBS + 0.12, -0)
- (T) NPS: ≥ 20 - (HBS + 0.19, -0)
- (T) NPS: ≥ 26 - (HBS + 0.25, -0)

STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

All Units: Inches, Pounds

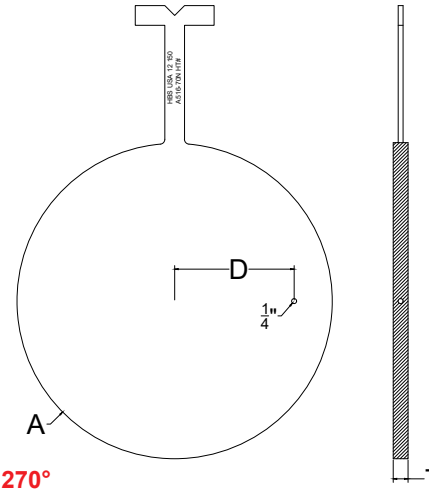

24 HOUR CALL OUT
409.736.7665

Vent Location: 90° - 180° - 270°

1500#	OD (A)	THICKNESS (T)	DISTANCE FROM CENTER (D)	DEPTH FROM OD	WEIGHT
1/2	2.38	0.75	0.25	1.00	3
3/4	2.62	0.75	0.38	1.00	3
1	3.00	0.75	0.50	1.00	4
1-1/4	3.38	0.75	0.50	1.25	4
1-1/2	3.75	0.75	0.62	1.25	4
2	5.50	0.75	1.00	1.75	7
2-1/2	6.38	0.75	1.25	2.00	9
3	6.75	0.75	1.62	1.75	11
4	8.12	0.88	2.12	2.00	17
5	9.88	1.12	2.62	2.38	30
6	11.00	1.38	2.88	2.62	44
8	13.75	1.62	3.88	3.00	77
10	17.00	2.00	5.00	3.50	139
12	20.38	2.38	6.00	4.25	232
14	22.62	2.62	6.62	4.75	312
16	25.12	3.00	7.62	5.00	440
18	27.62	3.38	8.62	5.25	594
20	29.62	3.75	9.62	5.25	755
24	35.38	4.38	11.75	6.00	1,247