

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


THICKNESS

- (T) NPS: ≤ 18 - (HBS + 0.12, -0)
- (T) NPS: ≥ 20 - (HBS + 0.19, -0)
- (T) NPS: ≥ 26 - (HBS + 0.25, -0)

STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

All Units: Inches, Pounds

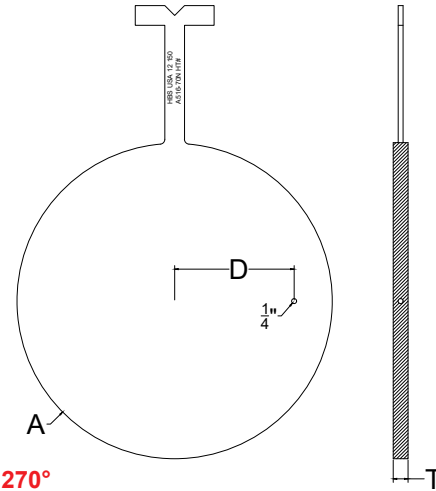

Vent Location: 90° - 180° - 270°

24 HOUR CALL OUT
409.736.7665

2500#	OD (A)	THICKNESS (T)	DISTANCE FROM CENTER (D)	DEPTH FROM OD	WEIGHT
1/2	2.62	0.75	0.25	1.12	3
3/4	2.88	0.75	0.38	1.12	4
1	3.25	0.75	0.50	1.12	4
1-1/4	4.00	0.75	0.50	1.50	5
1-1/2	4.50	0.75	0.62	1.62	6
2	5.62	0.75	1.00	1.88	7
2-1/2	6.50	0.75	1.25	2.00	11
3	7.62	0.88	1.62	2.25	16
4	9.12	1.12	2.12	2.50	26
5	10.88	1.38	2.62	2.75	43
6	12.38	1.62	2.88	3.25	64
8	15.12	2.12	3.88	3.62	119
10	18.62	2.62	5.00	4.38	216
12	21.50	3.12	6.00	4.75	340