

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


THICKNESS

- (T) NPS: ≤ 18 - (HBS + 0.12, -0)
- (T) NPS: ≥ 20 - (HBS + 0.19, -0)
- (T) NPS: ≥ 26 - (HBS + 0.25, -0)

STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

All Units: Inches, Pounds

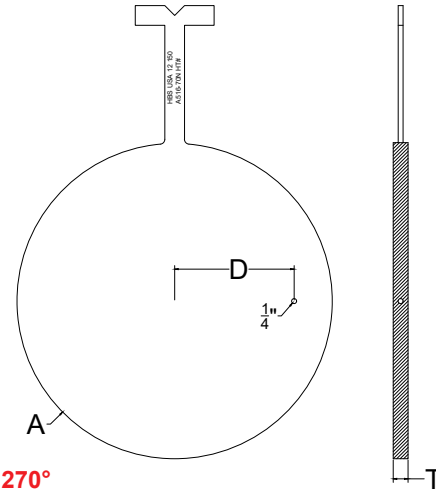

Vent Location: 90° - 180° - 270°

24 HOUR CALL OUT
409.736.7665

300#	OD (A)	THICKNESS (T)	DISTANCE FROM CENTER (D)	DEPTH FROM OD	WEIGHT
1/2	2.00	0.75	0.25	0.75	3
3/4	2.50	0.75	0.38	0.88	3
1	2.75	0.75	0.50	0.88	3
1-1/4	3.12	0.75	0.50	1.12	4
1-1/2	3.62	0.75	0.62	1.25	4
2	4.25	0.75	1.00	1.12	5
2-1/2	5.00	0.75	1.25	1.25	6
3	5.75	0.75	1.62	1.25	8
3-1/2	6.38	0.75	1.88	1.38	9
4	7.00	0.75	2.12	1.38	10
5	8.38	0.75	2.62	1.62	14
6	9.75	0.75	2.88	2.00	18
8	12.00	0.88	3.88	2.12	33
10	14.12	1.00	5.00	2.12	50
12	16.50	1.12	6.00	2.25	74
14	19.00	1.25	6.62	2.88	107
16	21.12	1.50	7.62	3.00	157
18	23.38	1.62	8.62	3.12	205
20	25.62	1.75	9.62	3.25	265
24	30.38	2.00	11.75	3.50	421