

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


THICKNESS

- (T) NPS: ≤ 18 - (HBS + 0.12, -0)
- (T) NPS: ≥ 20 - (HBS + 0.19, -0)
- (T) NPS: ≥ 26 - (HBS + 0.25, -0)

STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

All Units: Inches, Pounds

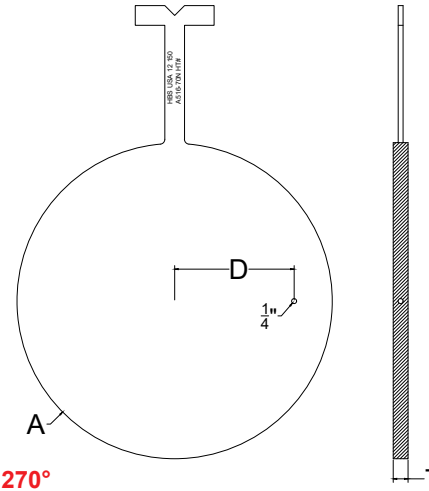

Vent Location: 90° - 180° - 270°

24 HOUR CALL OUT
409.736.7665

600#	OD (A)	THICKNESS (T)	DISTANCE FROM CENTER (D)	DEPTH FROM OD	WEIGHT
1/2	2.00	0.75	0.25	0.75	3
3/4	2.50	0.75	0.38	0.88	3
1	2.75	0.75	0.50	0.88	3
1-1/4	3.12	0.75	0.50	1.12	4
1-1/2	3.62	0.75	0.62	1.25	4
2	4.25	0.75	1.00	1.12	5
2-1/2	5.00	0.75	1.25	1.25	6
3	5.75	0.75	1.62	1.25	8
3-1/2	6.25	0.75	1.88	1.25	9
4	7.50	0.75	2.12	1.63	12
5	9.38	0.75	2.62	2.12	19
6	10.38	0.88	2.88	2.38	26
8	12.50	1.12	3.88	2.38	45
10	15.62	1.38	5.00	2.88	82
12	17.88	1.62	6.00	3.00	124
14	19.25	1.75	6.62	3.00	153
16	22.12	2.00	7.62	3.50	228
18	24.00	2.12	8.62	3.38	283
20	26.75	2.50	9.62	3.75	411
24	31.00	2.88	11.75	3.75	631