

TOLERANCES

- (A) Outside Diameter: (+/- 0.12)
- (B) Inside Diameter: (+/- 0.12)


THICKNESS

- (T) NPS: ≤ 18 - (HBS + 0.12, -0)
- (T) NPS: ≥ 20 - (HBS + 0.19, -0)
- (T) NPS: ≥ 26 - (HBS + 0.25, -0)

STANDARD FINISHES

- Smooth Mill (Some Scale May Be Apparent)
- Spiral Serrated Machine (125-250 AARH)

All Units: Inches, Pounds

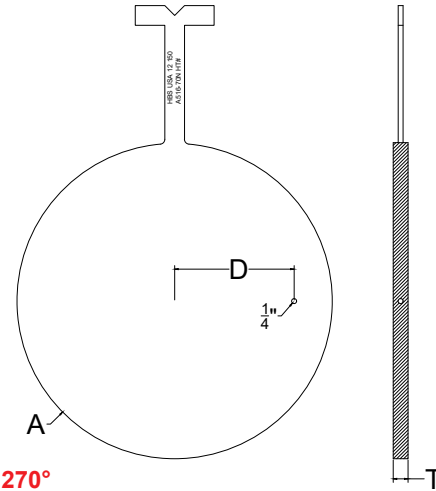

Vent Location: 90° - 180° - 270°

24 HOUR CALL OUT
409.736.7665

900#	OD (A)	THICKNESS (T)	DISTANCE FROM CENTER (D)	DEPTH FROM OD	WEIGHT
1/2	2.38	0.75	0.25	1.00	3
3/4	2.62	0.75	0.38	1.00	3
1	3.00	0.75	0.50	1.00	4
1-1/4	3.38	0.75	0.50	1.25	4
1-1/2	3.75	0.75	0.62	1.25	4
2	5.50	0.75	1.00	1.75	7
2-1/2	6.38	0.75	1.25	2.00	9
3	6.50	0.75	1.62	1.62	9
4	8.00	0.75	2.12	1.88	15
5	9.62	0.88	2.62	2.25	23
6	11.25	1.00	2.88	2.75	33
8	14.00	1.38	3.88	3.12	67
10	17.00	1.62	5.00	3.50	113
12	19.50	1.88	6.00	3.75	169
14	20.38	2.12	6.62	3.62	207
16	22.50	2.38	7.62	3.62	281
18	25.00	2.62	8.62	3.88	378
20	27.38	2.88	9.62	4.12	496
24	32.88	3.50	11.75	4.75	864